



Best Performance MicroLED Video Wall Display

Flip-Chip LEDs | Smaller Pixel Pitch | Perfect Resolution | True HDR Effect | Energy Saving Mode



Key Features :

- ◇ Available in 0.9mm, 1.2mm, 1.5mm and 1.8mm pixel pitches
- ◇ Flip-Chip (wireless) MicroLED; new driver IC; single package
- ◇ 27" diagonal cabinets; 16:9 aspect ratio
- ◇ Wall-mounted, full front access and service
- ◇ Standard data and power connectors

Flip-Chip LEDs

ImagePath™ ClearView LED Micro is the premium line of fine-pitch MicroLED Videowall displays that uses Flip-Chip LEDs. The product features a very high standard of performance and delivers exceptional clarity up to 8K resolution. The wide viewing angle and color gamut results in outstanding image quality in terms of color, brightness, and contrast.

Perfect Resolution and Slim is in

ImagePath™ ClearView LED Micro come in the ideal 16:9 aspect ratio that enables the various pixel pitch models to be easily configured in Full HD and UHD (4K) resolutions. The displays can also be configured to form Videowalls with non-standard configurations for a wider range of applications. With the finest pixel pitch, the installation can have a minimum viewing distance of under 2 meters. 27" cabinet features front installation and service, enabling users to mount them directly on the wall. This results in an installed depth under 10cm, making it a viable option when a slim mounted profile would look best.


Energy Saving Mode

ImagePath™ ClearView LED Micro uses micro technologies, improved chip integration and efficiency—resulting in lower power consumption. Under the energy-saving mode, users can attain the typical brightness at just 30% of the usual energy consumed. In deep sleep mode, power consumption goes below 20 watts per sqm.

MicroLED is Big in Power

MicroLEDs are less than half the size of the smallest standard LEDs but it delivers up to three times the brightness, excellent visual performance, and color uniformity, requiring less power and emitting less heat at a given brightness. They deliver more vivid colors while leaving more space for a black canvas, providing greater detail with dark images and better overall contrast. The MicroLED design has a smaller footprint, thus reducing light blockage and ambient-light reflection. The tiny size of the LED makes it possible to attain the highest resolution possible for LED Video walls of all sizes.

MicroLED Schema

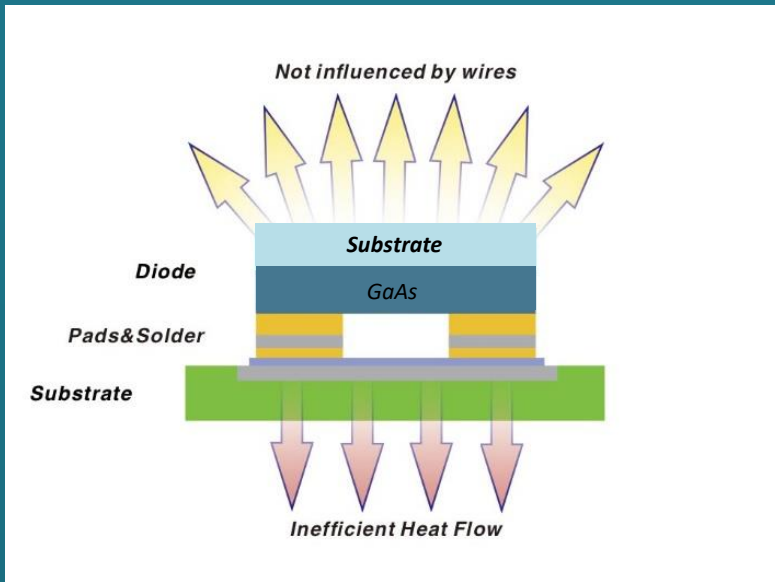

Unlike the normal chip, the Flip-Chip is directly connected to the substrate, eliminating the need for the welding wire. Flip-Chip offers the following advantages:

1. Eliminate welding wire failure; improve stability.
2. Heat dissipation performance improves.
3. Improved quality of light since there is no welding line shielding.
4. Five sides of light can be realized by adding a reflective layer at the bottom. Light efficiency is higher than the normal COB.
5. There is a polymer material that completely fills the gap in between the Flip-Chip and the substrate. This eliminates the risk of moisture seeping in and causing a short-circuit. This also solves the caterpillar problem that happens in the display industry.

The traditional package solution uses a common resin-plugging method which contains two materials: resin and metal. The resin and metal layers tend to leak outside the package after encapsulation, thereby resulting in resin shedding. This results in water pressure entering under the environment and causing a short circuit.

The new package solution is optimized to solve this anomaly by adopting the innovative technology of embedded holes and integrating it into the packaging process. This mitigates the risk of water vapor seeping, thus eliminating the possibility of "caterpillars".


The combination of HDR control and the unique black surface technologies results in a Videowall that delivers ultra-high contrast and true HDR effect. The screen brightness can be increased up to 1500 nits while the power consumption level remains constant. Under half-power conditions, the viewing angle remains at over 170°. The powerful video-processing and data correction capabilities can reveal more details and textures, enhance the low-grayscale content, and highlight the intricacies of images. It also performs image noise reduction, sharpening, color optimization and color temperature adjustment.

Advanced Image Technology



low-gray local details of the screen are improved

Greatly Improved Contrast Ratio

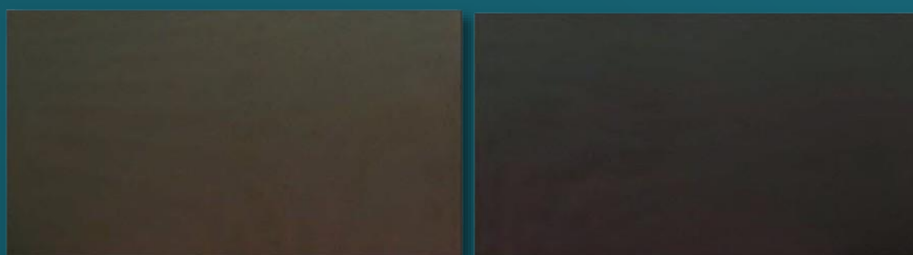


SMD products low contrast, yellow display

ClearView LED Micro High Contrast, extreme black display

The areas of the MicroLED outside the crystal/bond wire areas are covered with ink. With a smaller pixel area and the pixels interiors blackened, the increased proportion of the product's black areas results in ultra-high contrast levels. Micro High contrast, extreme black display, but SMD Low contrast, yellow display.

Energy Saving Mode

ImagePath™ ClearView LED Micro uses micro technologies, improved chip integration and efficiency—resulting in lower power consumption. Under the energy-saving mode, users can attain the typical brightness at just 30% of the usual energy consumed. In deep sleep mode, power consumption goes below 20 watts per sqm.

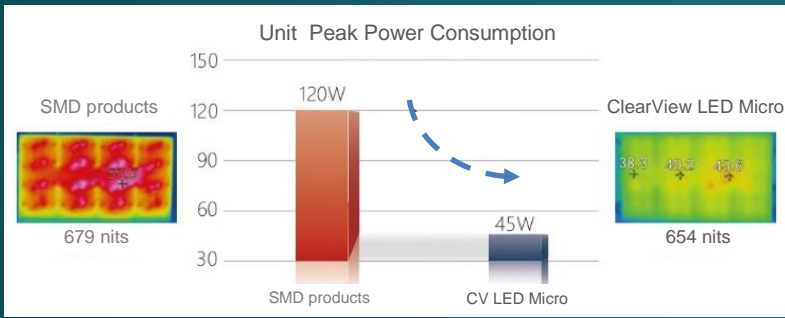

ClearView LED Micro power consumption and temperature levels are much lower than normal SMD products

SPECIFICATION

Type	CV LED Micro 0.9	CV LED Micro 1.2	CV LED Micro 1.5	CV LED Micro 1.8
Pixel Pitch	0.9375mm	1.25mm	1.5625mm	1.875mm
Module Resolution	160 × 360	150 × 337.5	96 × 216	80 × 180
Cabinet Resolution	640 × 360	480 × 270	384 × 216	320 × 180
Pixel density	1137778dot/m ²	640000dot/m ²	409600dot/m ²	284444dot/m ²
Peak brightness(after calibration)	2000nits	1600nits	1600nits	1600nits
Contrast Ratio	15000:1	20000:1	20000:1	20000:1
Power Consumption, Max	95w/unit; 470w/m ²	92w/unit; 455w/m ²	90w/unit; 445w/m ²	90w/unit; 445w/m ²
White Balance 100% White Brightness (calibration)	1200-1500 nits			
Color temperature	3000-10000K (Adjustable)			
Deviation of LED luminance Center	<3%			
Brightness Uniformity	≥ 97%			
Chromaticity Uniformity	±0.003Cx, Within the Cy			
NTSC gamut coverage	125%			
Color Depth	16-bit			
Flatness	≤ 0.1mm			
Curvature installation up to	5°			
Cabinet Size	600 x 337.5 x 53mm 23.62 x 13.29 x 2.09in			
Cabinet Diagonal	688.4mm 27.1in			
Cabinet Area	0.2025m ² 2.18ft ²			
Modules/Cabinet (WxH)	4 x 1			
Module Size	150x337.5mm 5.91x13.29in			
Line Voltage	100-240V AC, 50/60Hz			
Drive Mode	Constant current PWM drive			
Cabinet Weight (per display)	6kg 13.227lbs			
Cabinet Weight (per m ²)	30kg 66.12lbs			
LED Refresh Rate	≥ 3840Hz			
Frame Rate	50, 60Hz			
3D (100/120Hz)	Optional			
Color Temperature, Adjustable (k)	3,000 - 10,000			
Viewing Angle, Horizontal, Vertical	170° H, 170° V			
Installation	Front / Rear			
Service Access	Front			
Environment	Indoor			
Operating Temperature/Humidity	-20° to 40° C 10-90% (non-condensing)			
Storage Temperature/Humidity	-30° to 60° C 10-80% (non-condensing)			
LED Lifetime (Typical)	100,000hrs			
Runtime Duty Cycle (Hours/Day)	24/7			

ImagePath Display Company USA

www.image-path.com

Powerful | Interactive | Collaborative

