




Video Wall Display 55" | Infinite VW5502T

Best Performance to Visualize Infinite Images

Ultrathin 0.44 mm bezel width | Industrial Grade | Superior Quality and Durable | Display Port Interface

ImagePath™ Infinite delivers best performance on 55" video wall technology while remaining simple to operate and easy to maintain. Suitable for use in Control Room, Meeting Room, Function Room and Digital Signage. Industrial grade, superior quality and durable, supporting businesses with 24x7 operations. True ultra-thin even bezel width 0.44 mm, creates an infinite image on the video walls. Display Port input-output interface is available on Infinite VW5502T type E for daisy chain system use

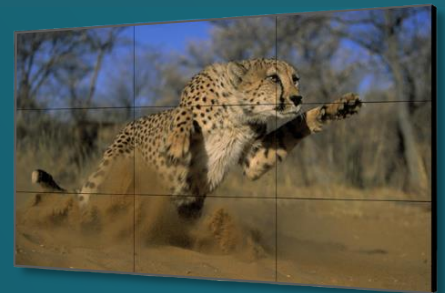

High Compatibility with ImagePath™ RealView Series
and support all other leading video wall processors


ImagePath™ Infinite video wall display comes with a big picture processing that allows input content up to 4K resolution to be spread over multiple displays up to 10x10 for multi input content configurations, VW5502T is highly compatible with all types of ImagePath™ RealView video wall processors and supports other leading video wall processors

OPVB - Original High Precision Video Wall Bracket

which makes installing ImagePath™ Infinite video walls Faster, Easier, and more Precise

Unlike other brands, Infinite video walls are equipped with Original High Precision Video Wall Bracket - OPVB mounting system, designed and manufactured by ImagePath™ factory. OPVB allows each video wall display to be precisely adjusted up/down, forward/backward, tilted, from front and rear access. No need for expensive third party video wall brackets to install Infinite on the wall, only need a horizontal pole to hang the OPVB, very fast and easy



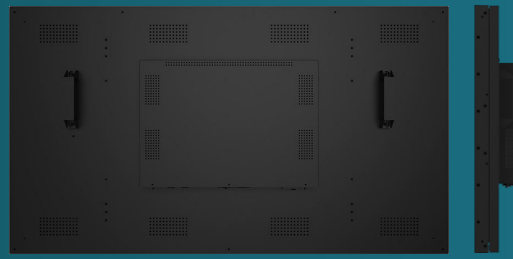

PANEL		MOUNTING SYSTEM	
Screen Diagonal	55"	Type	ImagePath™ OPVB (4 pcs per display)
Backlight	LED	Orientation	Landscape or Portrait
Resolution	1.920 x 1.080 (pixels)	In Wall Service	Front and Rear access
Bezel width	0.44 mm (btb 0.88 mm)	Adjustment	High Precision 6 axis integrated
Brightness	500 cd/m ² (typ.)	Material	Solid Steel (3mm), CNC cutting and bending
Contrast Ratio	1300 : 1 (typ.)	Treatment	Anti-Rust Coating
Response time	8 ms (typ.)	POWER	
Pixel pitch	0.63 (H) mm x 0.63 (V) mm	Voltage	100 ~ 240 VAC, 50-60 Hz
Frequency	60 Hz	Power consumption	180W (typ.)
View angle	178° (H) / 178° (V)	ENVIRONMENT	
Life time	60.000 hours	Operating temperature	0°C ~ 40°C
Color saturation (x% NTSC)	72%	Storage temperature	-10°C ~ 60°C
Color support	1.07B colors	Storage humidity	10% ~ 90% RH Non-Condensing
Protection	IP5X	Operating humidity	20% ~ 85% RH Non-Condensing
Certification	EMC Class B	WEIGHT & PACKING	
Usage (hour/day)	24/7	Net Weight - Packing	19.8 kg - 32.1 kg
Noise level	No noise (fanless operation)	Packing size (W x D x H)	1290 x 300 x 800 mm
Big picture	Up to 10x10	ACCESSORIES	
I/O INTERFACE		Power Cord	1
Type-E Inputs	HDMI x2, DP x2, USB x1, LAN x1 RS232(RJ45) x1, IR x1	User's Manual	1
Type-E Outputs	DP x1, RS232(RJ45) x1	Warranty Card	1
Type-C Inputs	HDMI x1, DVI-D x1, USB x1		
Type-C Output	VGA x1, RS232(RJ45) x1, IR x1 RS232(RJ45) x1		

DIMENSIONS (mm)

